




D2M\_H7A / 120 cells  
310W - 335W  
Mono-Crystalline PV Module

URE Peach module uses URE state-of-the-art cell cutting technology, and advanced module manufacturing experiences.

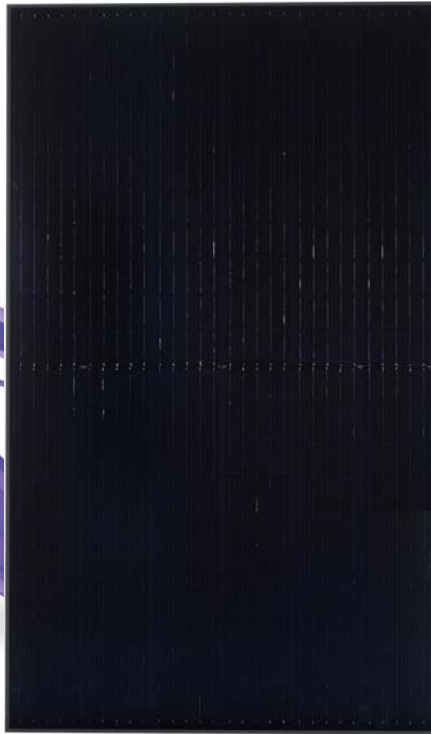

1702 mm (L) x 1002 mm (W) x 35 mm (D) / 23 kg

## Key Features



Positive power tolerance  
+0 ~ +4.99 watt



100% EL inline inspection  
Better module reliability



Withstand heavy loading  
front load 5400 Pa & rear load 2400 Pa



Ammonia resistance  
According to IEC 62716 Ed. 1



Excellent low light performance  
3.5% relative eff. Reduction at low-irradiance (200W/m<sup>2</sup>)

