



# Submittal Data Information

## Heat Dissipation Valve

#SS-6.2-1

Effective: March 3, 2011

Job: \_\_\_\_\_ Engineer: \_\_\_\_\_ Contractor: \_\_\_\_\_ Rep: \_\_\_\_\_

### Applications

The Apricus AP-ADD-HDIS valve kit is used to divert flow in solar thermal system to a heat dissipation system.

### Features

- Plug and play design
- 3-way diverting valve
- Electrically controlled actuator
- Standard 3/4" copper piping
- 120VAC to 24VAC transformer
- Connection cable
- Union fittings

### Materials of Construction


Valve Body:	Brass
Stern:	Brass
Spring:	Stainless Steel
Plug Rubber:	EPDM
Piping:	3/4" Copper

### Dimensions

Height:	14"
Depth:	5"
Width:	12"
Weight:	8 lbs

### Installation Guidelines

Max Flow Range:	15L/min / 3.96 GPM
Fluids:	Water Propylene Glycol (≤60%) Glycerine
Electrical:	120 VAC, 3 Phase
Location:	Indoors

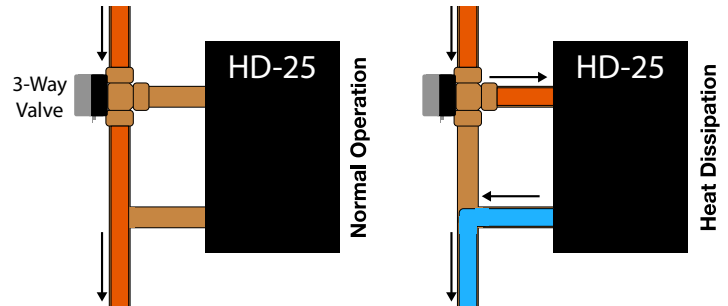

**Sustainable HOT WATER Solutions, Delivered by APRICUS**

6 Sycamore Way, Branford, Connecticut 06405 USA Ph: 203-488-8215 Fax: 203-488-8572  
office-usa@apricus.com www.apricus.com